



HTB

PS/ULTIMA

BUTYL PEEL & STICK UNDERLAYMENT

Weather Tight Head-lap...
protecting building assets!

“Premium Butyl High-Temp Self-Adhered Roof Deck Protection – Under Metal, Tile, Slate, Shakes, and Asphalt Shingles”

- **Engineered Construction...** extremely strong polypropylene surface with UV and weather resistive coatings that add water shedding redundancy in the roofing system while protecting the structure from damage
- **Advanced Surface Technology...** SecureWalk™ (top) creates incredible walkability
- **All Temperature Performance...** -40° F to 280° F; all climates, under all roofing styles
- **Weather-Tight Seal...** exclusive SecureLap™ system providing exceptional sealing
- **Durable...** heavy synthetic surface resists tearing during roof installation; UV stabilized surface resists UV degradation up to six months
- **100% Inorganic Surface...** synthetic construction offers long term moisture protection - won't rot and is inert to mold growth
- **Non-Woven “Cool Color” Surface...** stays cool and maximizes dimensional stability
- **Premium Adhesive Formulation...** butyl adhesive protects from the effects of severe Wind-Driven Rains, Water, Snow and Ice Damming.
- **Easy Peel Dual Film Technology...** allows for quick and simple release liner removal and underlayment installation

Description

CMI SecureGrip PS/ULTIMA HTB Self-Adhered Roof Underlayment is designed and manufactured to be a secondary water barrier in sloped roof system construction where toughness and longer exposures may be required. **SG PS/ULTIMA HTB** is an air, water and vapor barrier and must be installed only above properly ventilated spaces.

Uses

A superior performing self-adhered roof underlayment used under metal, tile, slate, shakes, and asphalt shingle roofing.

Storage


SecureGrip PS/ULTIMA HTB should be stored at temperatures between 20° F and 90° F, upright in the original cardboard box package in a dry and properly ventilated area.

Availability

SecureGrip PS/ULTIMA HTB is available throughout the United States. Check with your local representative for product availability.



SecureGrip PS/ULTIMA HTB Technical Data		
Attribute	Test Standard	SecureGrip PS/ULTIMA HTB Typical Values
Surface Color		Cool Blue Color
Surface Type		“Easy Walk” Non-Woven Synthetic Polymer
Reverse Side Release Surface		Silicon Treated Poly Split-Release Film
Weight per Square		19.5 lbs (8.8 kg)
Nail Sealability	ASTM D1970	Pass
Permeability	ASTM E96	0.034
Nominal Thickness	ASTM D5147	43 mils (1.1mm)
Tensile	ASTM D1970	MD 143 lbs/in / CD 133 lbs/in
Low Temp Flexibility	ICCAC 48	Pass
Tear Resistance	ASTM 1970	MD 208 lbf / CD 211 lbf
Adhesion to Plywood	ASTM D903	4° F 74 lbs/ft / 23° F 70 lbs/ft

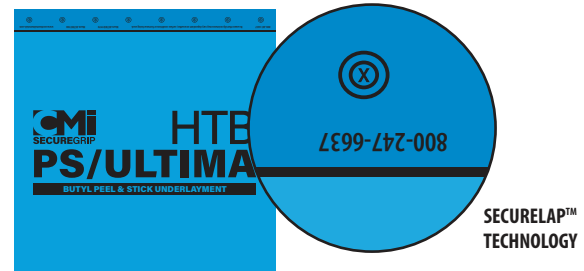

SecureGrip PS/ULTIMA HTB Roll Specifications			
Length Per Roll	66.7' (20.3 m)	Rolls Per Pallet	30
Width Per Roll	36" (0.914 m)	Pallet Weight	1,305lbs (591.9 kg)
Weight Per Roll	39 lbs (17.7 kg)	UV Resistance	180 days
Gross Roll Size	200 sq ft (18.6 sq m)		

Compliance Codes

Meets the Requirements of ASTM D1970
U.L. Classified as a Prepared Roofing Accessory

Notes

Below 40° F blind nailing at top and side laps recommended.
Use of primer and blind nailing at top and side laps suggested at 0° F.



Made in the U.A.E.

