SECUREGRIP AEROTECH 15


"Exceptional Synthetic Underlayment with Breathable Technology to Help Reduce Trapped Moisture on Your Roofing Projects"

AeroTech 15™

BREATHABLE ROOF UNDERLAYMENT

- **Advanced Engineering…** providing an affordable secondary water-shedding barrier for your shingle roof system.
- **Inorganic Construction…** 100% synthetic construction offers long term moisture protection - doesn't absorb water and is inert to mold growth.
- **Advanced Surface Technologies… SecureWalk** (top) and **SecureGrip** (back) create great walkability.
- **Improves Project Outcome…** rolls out flat and does not wrinkle, eliminating customer callbacks.
- **Easier Installation…** 33% more coverage per pass across the roof (vs 36" wide rolls).
- **Superior Performance…** designed to perform under extreme weather conditions.
- **Durable…** synthetic construction resists tearing during roof installation - UV stabilized to resist UV degradation up to 90 days.

"Non-Woven top and Anti-Slip reverse offers dynamic steep slope traction."

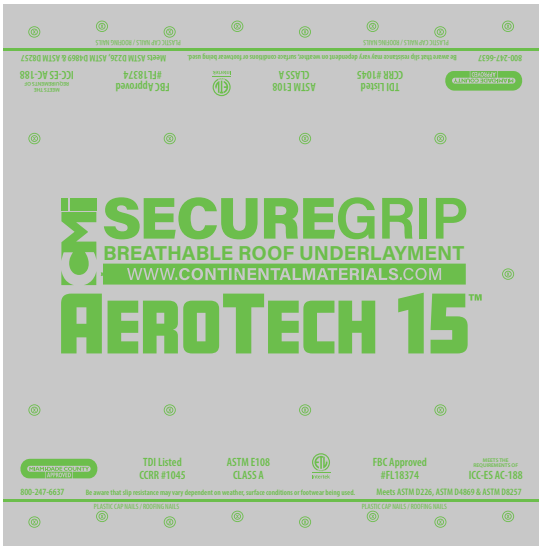

COMPLIANCE: CODES

Performance characteristics meet or exceed ASTM D4869 – Type I, II, III and IV

Performance characteristics meet or exceed ASTM D226 – Type I, II

UV Exposure – 90 days

U.L. Classified as a Prepared Roofing Accessory

PHYSICAL INFORMATION

Roll Size: 48" X 250'
Material Per Roll: 1000 sq. ft.
Squares Per Roll: 10 squares
Weight Per Roll: 24 lbs
Rolls Per Pallet: 25 rolls
Wt Per Pallet: 710 lbs
Wt Per 100 sq. ft.: 2.3 lbs
Limited Warranty: 30 Years

DESCRIPTION

SecureGrip AeroTech 15 Synthetic Roof Underlayment is synthetic roof-deck protection designed and manufactured to replace asphalt saturated felts and provides breathable technology to reduce moisture from becoming trapped in sloped roof systems.

USES

A cost effective roofing underlayment used beneath fiberglass and asphalt shingles, shakes, stone coated steel roofing shingles and synthetic slate.

STORAGE

Always store rolls upright on pallets (or in the cradled pallet the rolls are shipped on) and in a dry protected area.

AVAILABILITY

SecureGrip AeroTech 15 Underlayment is available throughout the United States. Check with your local representative.

PHYSICAL PROPERTIES			
	Standard	**Unit**	**AeroTech 15**
MD Tensile Strength	ASTM D5035	lbf	26.2
CD Tensile Strength	ASTM D5035	lbf	20
MD Elongation	ASTM D5035	%	158.3
CD Elongation	ASTM D5035	%	203.5
MD Tensile	ASTM D5034	lbf	77.8
CD Tensile	ASTM D5034	lbf	52.8
MD Elongation	ASTM D5034	%	96.8
CD Elongation	ASTM D5034	%	121.9
MD Tear Strength	ASTM D4533	lbf	33.2
CD Tear Strength	ASTM D4533	lbf	22.8
Permeability	ASTM E96	perms	15.65
Nominal Thickness	ASTM D5261	mils	21
Range of Temperature		° F	-40 ° F to 240 ° F
Fire Rating UL Class A*	ASTM E108		pass

**when used under UL Class A finished roofing*

©2026 Continental Materials, Inc. 11/26 • 1614 Old York Road • Abington, PA 19001 • (800) 247-6637 *visit us at* ***www.continentalmaterials.com***